




CWF 4140

CONCEALED ROLLER BLINDS

cwf.ie

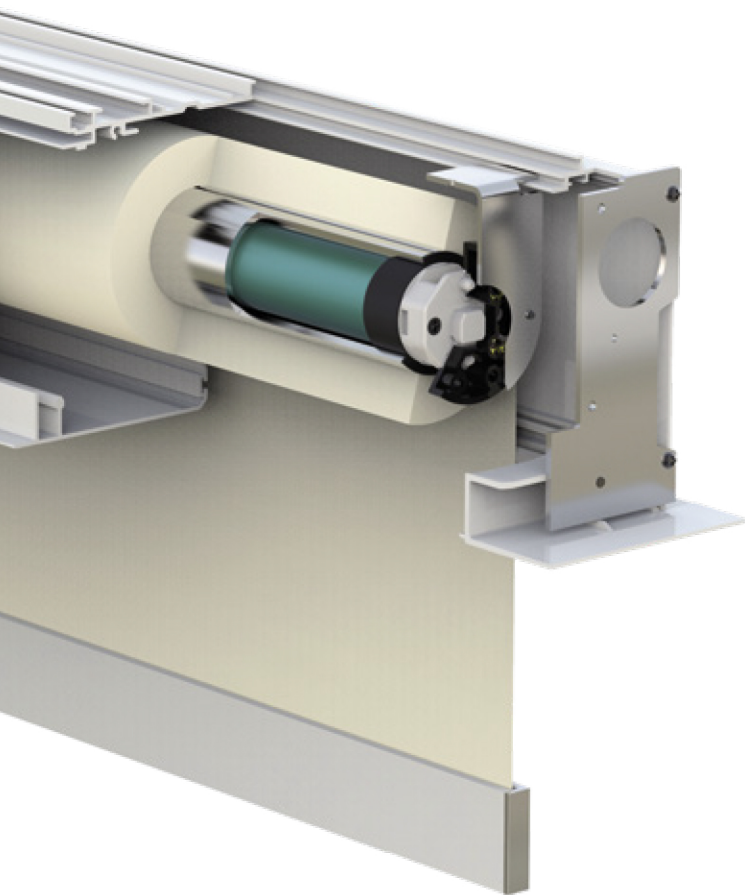

TOPBOX 4140

Topbox 4140 is a system for motorized roller blinds specific for concealed installation in the ceiling. The blinds is inside an aluminum box for easy installation in the false ceiling.

Install and remove the roller blind is very simple since the headbox is openable from the bottom.

Standard Topbox 4140 is available in RAL 9016 matt, or, on demand, in every RAL or customized colours.

The performance of the system is:

- Lightweight fabrics (max 150 gr/sqm) L 300cm x H 400cm.
- Medium and heavy fabrics (max 330/550 gr/sqm) L 400cm x H 200cm.



TOPBOX 4100 - 4128

Topbox 4100 are systems for indoor/outdoor motorized roller blind specific for concealed installation.

The blind is inside an aluminium box for easy installation. Install and remove the roller blind is very simple, since the headbox is openable from the bottom.

Topbox 4100 - 4128 can be available with different lateral side guides types:

- Steel cables AISI | A 316 @ 4mm CE certified
- Aluminium lateral sideguides for blackout fabrics
- Aluminium sideguides with windproof zippers CE Certified

All components are realized in AISI 316 steel for outdoor installation.

Performance:

Topbox 4100:

- Light weight fabrics (max 150 gr/sqm) L 300 cm x H 400cm.
- medium and heavy fabrics (max 330/550 gr/sqm) L 350cm x H 250cm.

Topbox 4128:

- Light weight fabrics (max 150 gr/sqm) L 400cm x H 400cm.
- medium and heavy fabrics (max 330/550 gr/sqm) L 400cm x H 250cm.



PLUS

1

INDOOR & OUTDOOR

Topbox 4100 is a system for roller blinds extremely versatile and suitable for a wide range of uses when the need is to install the concealed system in spaces of difficult access.

In case of indoor installation, Topbox 4100 is an optimal solution as filtering or even blackout blind if equipped with aluminium lateral guides.



2

TOPBOX 4100 WPRO

Topbox 4100 - 4128 Wpro are systems equipped with windproof “zipper” sliding into the aluminium side guides. Topbox Woro is the outdoor version CE certified in Class 6 equipped with all components in stainless anti-corrosion steel AISI/ 316.

Wporo System is the outdoor solution for medium and large windows operated by 230 Vac tubular motor.



3

SELF-SUPPORTING GUIDES

Topbox 4100 - 4128 are specific systems for recessed installation or for spaces of difficult access. For this purpose they are provided with specific anchorage inserts which make the Woro windproof guides self-supporting; in this

way the aluminium box that contains the roller blind does not need any fixing. This technical solution is optimal in case of ceilings that are not suitable for system fixing.



PLUS

4

RECESSED ROLLER BLIND

Topbox 4140 is a technological product where aesthetics is a priority. The roller blind, when winding, fits totally in its box including the seabed, allowing, besides the best aesthetic result, the use in the presence of windows flush with the ceiling.



5

BLACK OUT

Topbox 4140 is also available with LED backlighting, an innovative technological solution, that in addition to the pleasant effect of a soft lighting and make, the blind a complement of interior design.



6

LINKED BLINDS INSTALLATION

Topbox 4140 is also available in linked blinds version. Linked blinds are particularly pleasing in the presence of structures with large windows, getting popular in the current design.

The installation in parallel allows to have a minimum space between the blinds for a better control of the light. Even in the presence of linked blinds, TOPBOX 4140 is provided for simultaneous blinds operating or independent single blind.



PLUS

OPERATIONS

Topbox 4140 and 4100, either as single or linked blinds, are available in the following versions:

- Motor 230Vac with button control
- Motor 230 Vac with integrated R.F. receiver and remote control
- Motor 230 Vac with two ways integrated RF 868/915 MHz receiver and simultaneous control by button or M2Net remote control.



M2NET

Topbox 4140 and 4100 are systems controlled by wire or wireless in M2net environment. M2Net has been developed by Mottura to control its own motorized systems. It allows a real and continuous two-way dialog between the transmitter and the receiver as a mobile device's interface in the Wi-Fi world.

M2NET STATION

Come into the Internet world with M2Net!

M2Net Station is Mottura M2Net proposal to control our systems using Internet and mobile technology.



M2Net Station allows you to operate the curtains or even other devices directly from home or remotely with a smartphone, tablet or computer by a simple App.

A Mottura solution to improve your comfort and save energy.




INSTALLATIONS

TOPBOX 4140

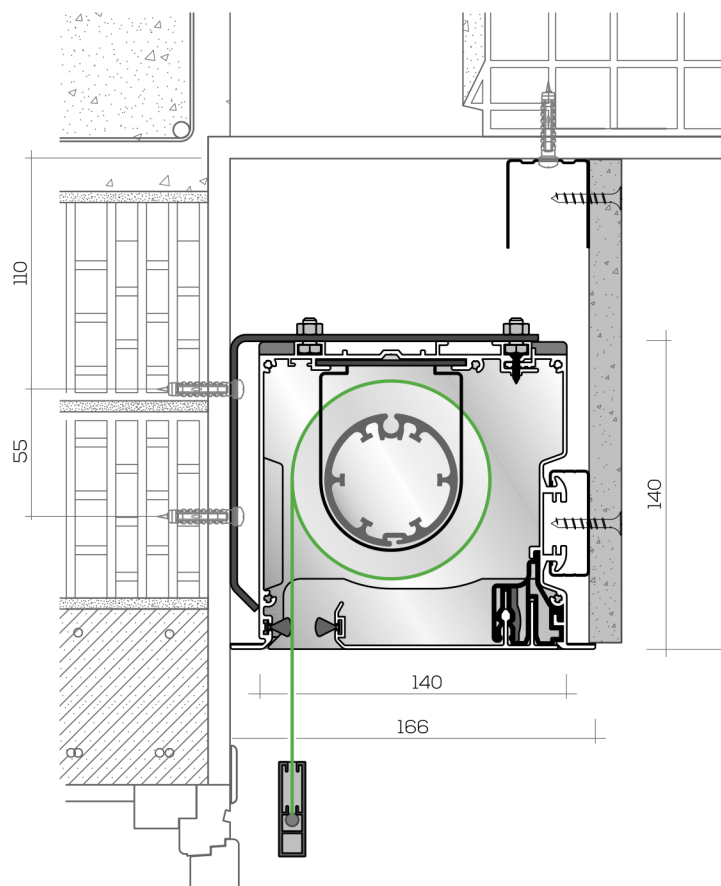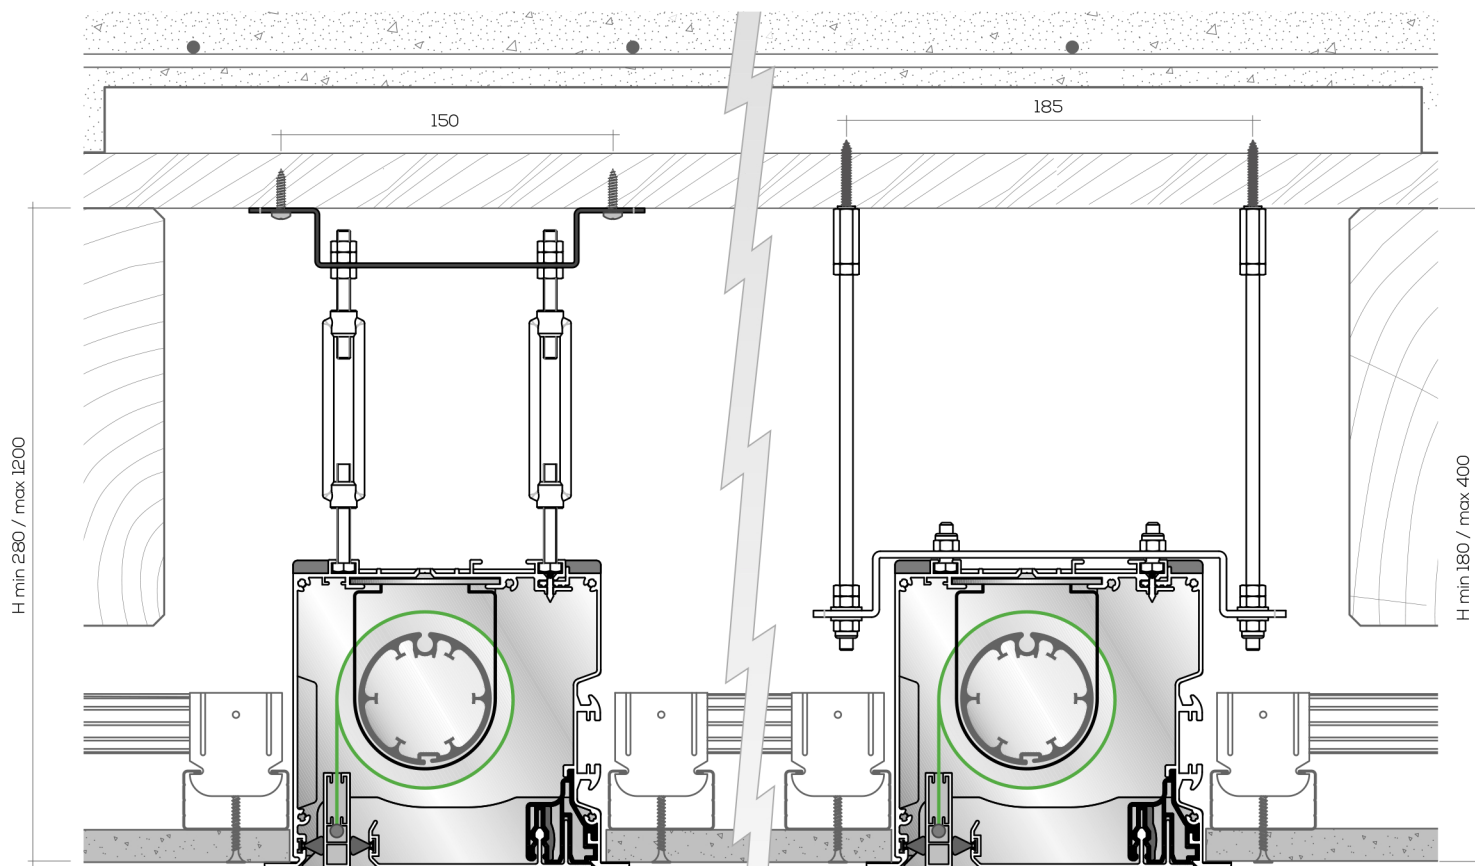




In developing TOPBOX 4140 we used the technical advice of Saint-Gobain Gyproc, world leader in plasterboard products and solutions. The result is a product of easy installation which fits perfectly to the current methods of installation of the plasterboard ceiling.

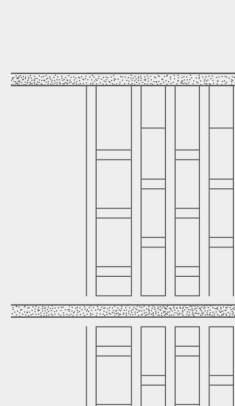


UNIVERSAL WALL PLUG
FISCHER SX-SP - 6X30 mm

INSTALLATIONS

TOPBOX 4140

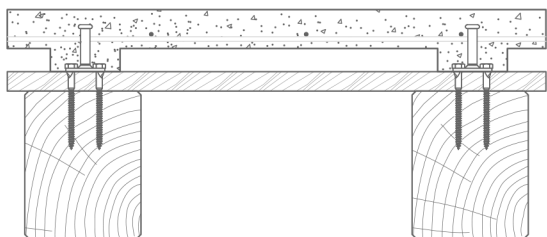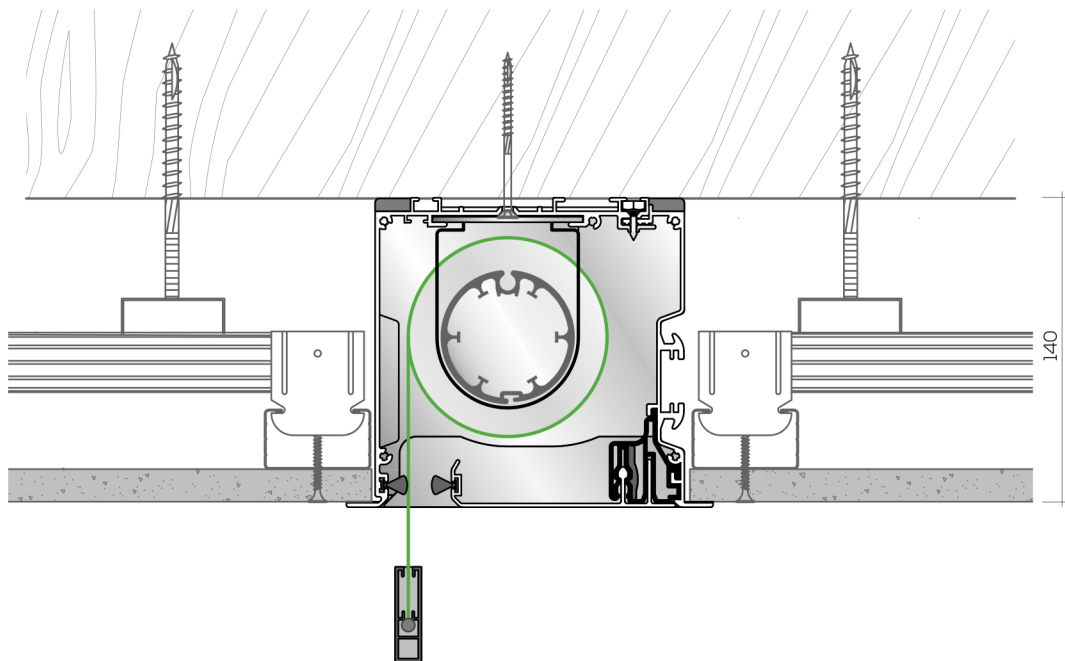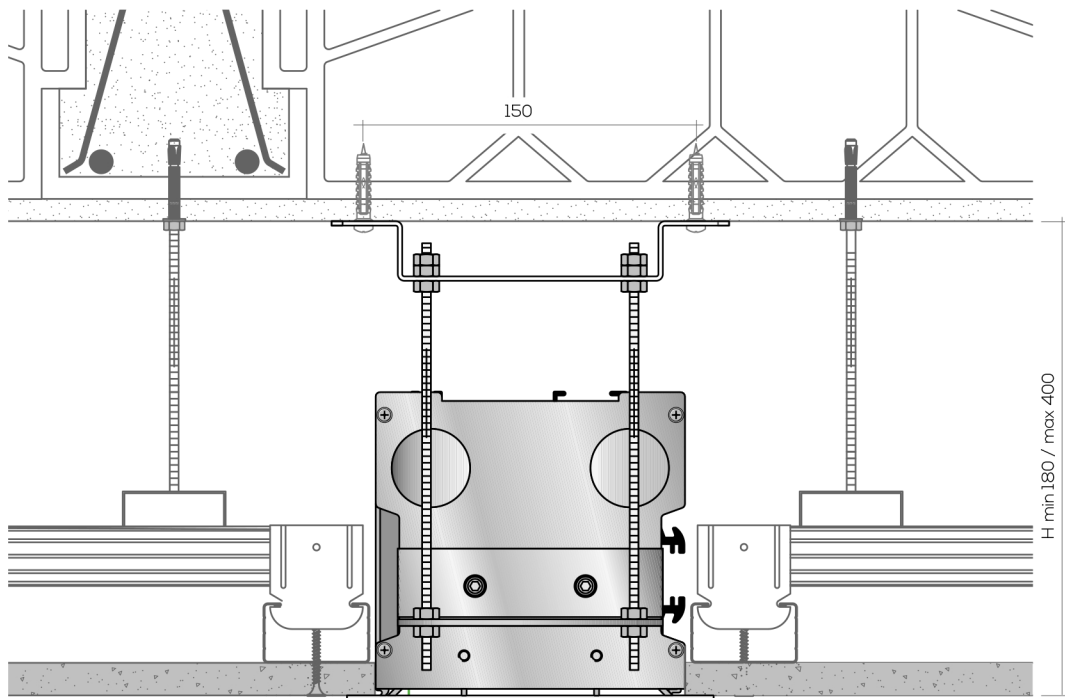

SELF-TAPPING SCREW
POWER-FAST FPF-PZ 5,0 X 50 ZPF




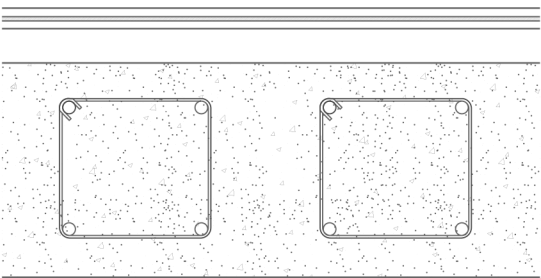


UNIVERSAL WALL PLUG
FISCHER SX-SP - 6 X 30 MM (8 X 40 MM)



INSTALLATIONS

TOPBOX 4140

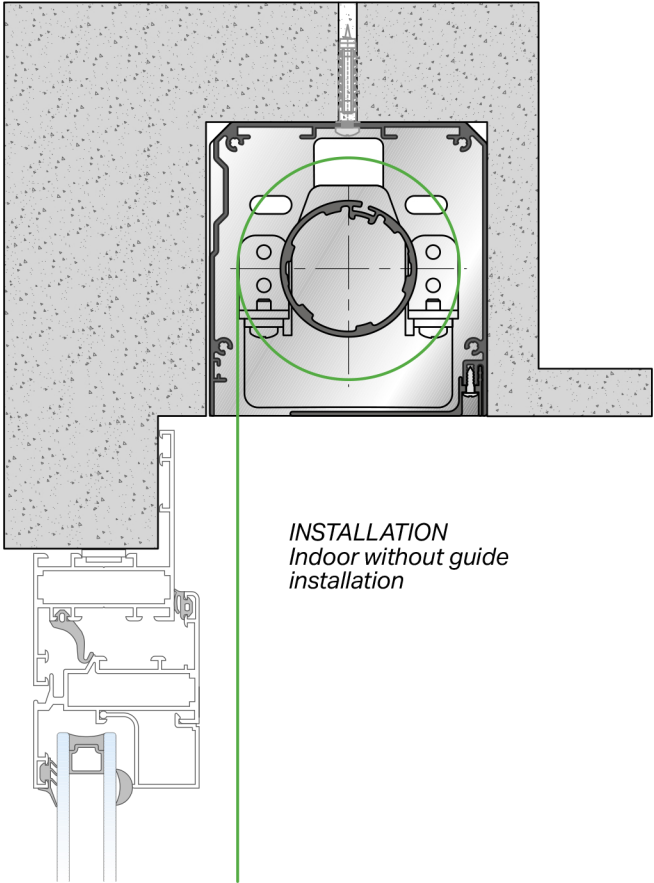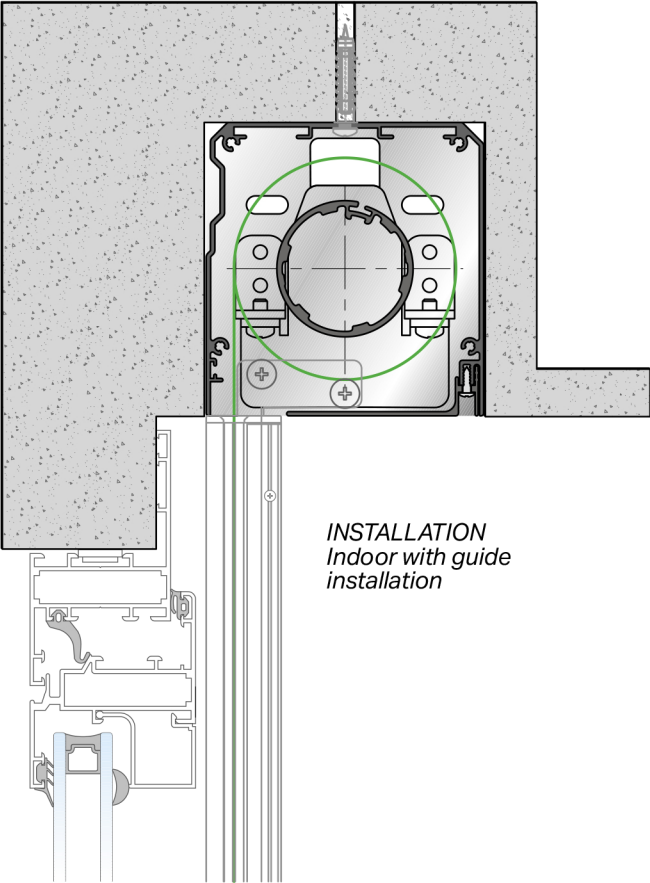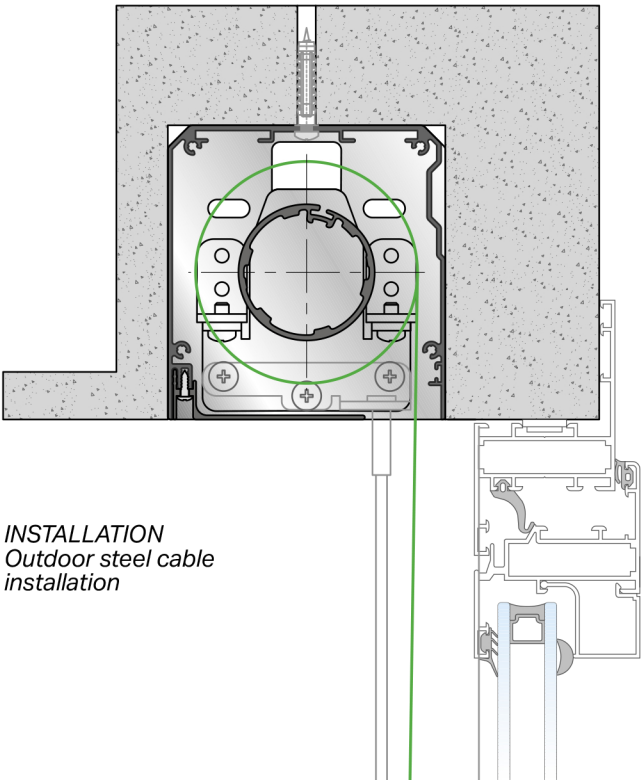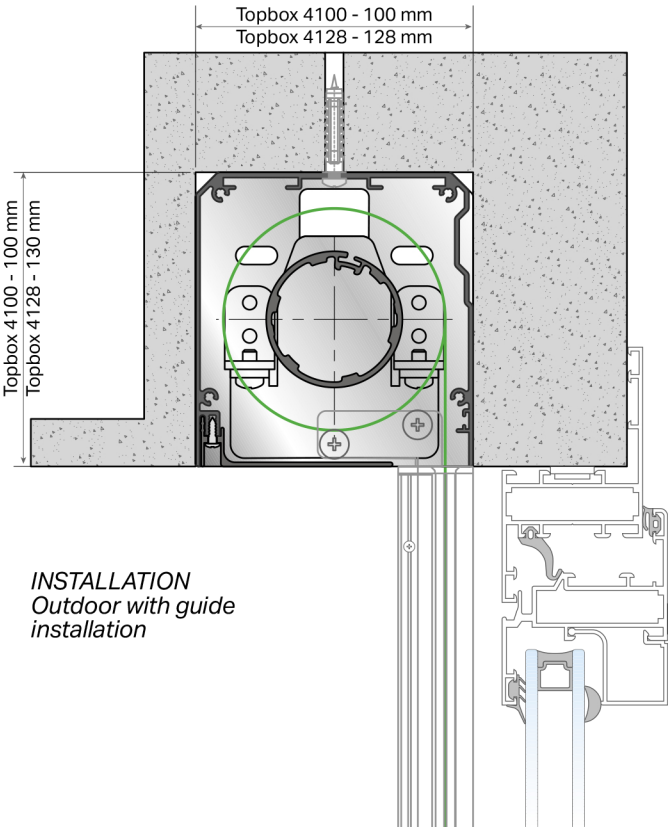

/ Weight expressed in grams

TOPBOX 4140

H\L	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400
120	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	150
140	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	150
160	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	150
180	880	880	880	880	880	880	880	880	880	880	880	550	550	550	330	150
200	880	880	880	880	880	880	880	880	880	880	550	550	550	550	330	150
240	880	880	880	880	880	880	880	880	880	880	550	550	550	330	330	150
280	880	880	880	880	880	880	880	880	880	550	550	330	330	330	150	150
320	880	880	880	880	880	880	880	880	550	550	330	330	330	330	150	
360	880	880	880	880	880	880	880	550	550	550	330	330	330	330	150	
400	880	880	880	880	880	880	550	550	550	550	330	330	330	150	150	
440	880	880	880	880	880	550	550	550	550	330	330	330	150	150	150	

TOPBOX 4140 - without side guides / with steel cables side guides

H\L	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400
120	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	150
140	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	150
160	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	150
180	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	150
200	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	150
240	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	150
280	880	880	880	880	880	880	880	880	880	880	880	880	550	330	150	150
320	880	880	880	880	880	880	880	880	880	550	550	550	550	330	150	
360	880	880	880	880	880	880	880	880	880	550	550	550	550	330	150	
400	880	880	880	880	880	880	880	550	550	550	330	330	330	330	150	
440	880	880	880	880	880	880	550	550	550	550	330	330	330	150	150	

TOPBOX 4100 - with aluminium lateral side guides

[illegible]

TOPBOX 4128 - without side guides/with steel cables side guides

[illegible]

TOPBOX 4128 - with aluminium lateral side guides

HVL	140	160	180	200	220	240	260	280	300	320	340	360	380	400	420	440	460	480	500
160	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	330
180	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330
200	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330
240	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330
280	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	330
320	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	150
360	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	550	330	150
400	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	330	150
440	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	550	330	330	150
480	880	880	880	880	880	880	880	880	880	880	880	880	880	550	550	550	330	150	150
520	880	880	880	880	880	880	880	880	880	880	880	880	880	550	550	550	330	150	150
560	880	880	880	880	880	880	880	880	550	550	550	550	550	550	550	330	330	150	150

