
ROMAN BLIND SETUP GUIDE


1 CONNECT THE MOTOR

Plug the battery into the motor.

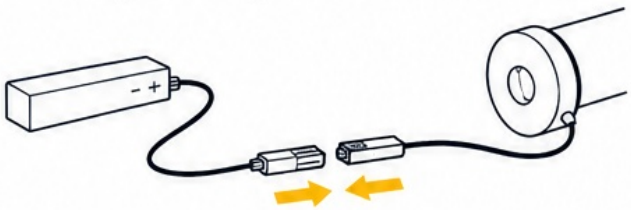

The motor will make **1, 2 or 3 up/down** movements.

This tells you its current status.

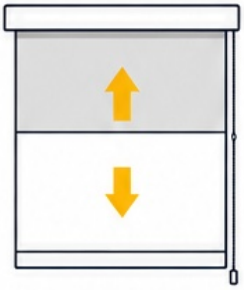

HOW MANY UP AND DOWN MOVEMENTS DID THE MOTOR DO?

1 MOVEMENT

ALREADY PAIRED – NO SETUP REQUIRED.

Your blind is ready to use.

2 MOVEMENTS — PAIR THE REMOTE

1. Press ▲ and ▼ to check the blind moves.
2. Briefly press the **PROG** button on the remote.
3. Move the blind to approximately halfway.
4. Hold ▲ + ▼ together until the blind jogs.
5. Hold **MY** + ▼ together until the blind jogs.

SETUP COMPLETE.

3 MOVEMENTS — COMPLETE INITIAL SETUP

1 CHECK DIRECTION

Press ▲.

- If the blind moves up, continue.
- If it moves down, hold **MY** until the blind jogs to reverse the direction.

2 SET UPPER LIMIT

- Hold ▲ to the desired top position.
- Fine adjust if required.
- Press **MY** + ▼ briefly to save.

3 SET LOWER LIMIT

- Hold ▼ to the desired bottom position.
- Fine adjust if required.
- Press ▲ + **MY** briefly to save.

4 FINISH PROGRAMMING

1. Press **MY** for 2 seconds until the blind jogs.
2. Briefly press **PROG** on the remote.

SETUP COMPLETE.

QUICK REFERENCE

1 MOVEMENT	=	Already paired – ready to use
2 MOVEMENTS	=	Pair the remote
3 MOVEMENTS	=	Complete initial setup

NOTE: Use small adjustments and take your time when setting limits for best results.